

# GOOD PRACTICES FOR BULK ROAD TANKER UNLOADING (BLOWING OFF)

This activity covers the discharge of silica sand and flour products from a road tanker into a storage silo, particularly dry materials.

## ACCESS

Restrict access to the work area to authorised personnel only.


## DESIGN AND EQUIPMENT

### Road Tanker

- Limit the discharge rate to the design capacity of the receiving silo and dust extraction unit. Offloading pressures should be agreed with the silo operator.
- Tanker offloading pipes, connectors and seals must be designed to withstand the high air pressures and abrasion associated with blowing operations.
- Note that there will be a surge of air pressure as the last sand/flour is blown into a silo. Hence the need for constant supervision of offloading operations.

### Customer silo

- Storage silos should be purchased only from reputable suppliers.
- Appropriate engineering design methods should be employed to ensure adequate structural strength.
- Engineering controls must be employed to prevent over-pressurisation of the silo while it is being filled. Ensure that the silos are equipped with pressure relief devices and high level alarms. They must also have dust extraction systems to remove and clean the displaced air.
- Silo dust extraction units must be fitted with filters that are appropriate to the particle size range of the product.
- Offloading pressures should be agreed with the tanker operator.
- Note that flour products have varying bulk density. Put in place procedures to ensure that silos are not overfilled.
- Silos should be equipped with a dust extraction system to prevent the emission of dust from the silo during tanker offloading.

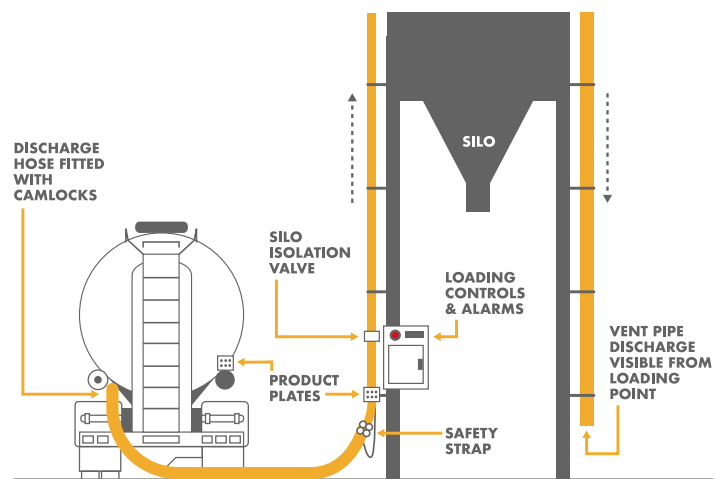

- Pipework and ductwork should be designed to minimise shock losses (caused by bends, constrictions etc.); to minimise dead spots where material may accumulate and to facilitate easy clearing of blockages.
- Silo connection points should be located as close as possible to the delivery tanker parking area. This will eliminate the need for long lengths of flexible hose.
- Safe means of access should be provided to those parts of the silo requiring inspection and maintenance.

## MAINTENANCE

- Maintain pipes/hoses, connectors and seals in good condition to reduce the likelihood of dust escaping during blowing operations.
- Dust extraction systems on silos must be maintained in accordance with manufacturers' instructions.

## EXAMINATION AND TESTING

- A competent person should test the performance of dust extraction systems at least annually.
- Tanker drivers should check the condition of pipes/hoses and seals daily and obtain replacements as necessary.
- Any faults with the pipes/hoses/connectors and silo dust extraction systems must be reported as soon as possible so that remedial action can be taken.
- Put in place measures of controlling the risk of bacterial growth within water sources used across site, focusing most on systems where water droplets will be generated.

## CLEANING AND HOUSEKEEPING

- The tanker offloading area should be kept clean and tidy.
- Clean your workplace on a regular basis.
- Deal with spills immediately.
- **DO NOT clean up with a dry brush or using compressed air.**
- Use vacuum or wet cleaning methods.

## TRAINING

- Give your employees information on the health effects associated with respirable crystalline silica dust.

- Provide employees with training on: dust exposure prevention; checking controls are working and using them; when and how to use any respiratory protective equipment provided and what to do if something goes wrong. Refer to task guidance sheet **2.3.4** and part 1 of the Good Practice Guide.

## SUPERVISION

- Ensure procedures are in place to prevent overfilling of silos.
- Have a system to check that dust control measures are in place and that they are being followed. Refer to task guidance sheet **2.3.3**.
- Employers should make sure that employees have all the means to perform the checklist given below.

## PERSONAL PROTECTIVE EQUIPMENT

- Refer to task guidance sheet **2.1.15** dedicated to Personal Protective Equipment.
- Risk assessment must be carried out to check the effectiveness of control measures.
- Respiratory protective equipment (with the appropriate protection factor) may need to be worn when disconnecting the offloading pipe at the back of the tanker, when remedying any escape of dust or in the event control measures fail.
- Provide storage facilities to keep personal protective equipment clean when not in use. Replace this equipment at intervals recommended by suppliers.

## EMPLOYEE CHECKLIST

- |  |  |  |   |
|--|--|--|---|
| <input type="checkbox"/> Tanker drivers must supervise their offloading operations at all times. | <input type="checkbox"/> Look for signs of damage, wear or poor operation of any equipment used. If you find any problems, tell your supervisor.   | <input type="checkbox"/> Clean up spillages of sand and flour immediately, using wet cleaning methods.   | <input type="checkbox"/> Use, maintain and store any respiratory protective equipment provided in accordance with instructions.   |
| <input type="checkbox"/> Agree offloading pressures with the customer.                           | <input type="checkbox"/> If you think there is a problem with your dust control equipment, ensure additional control measures are taken to reduce exposure to respirable crystalline silica dust while the problem persists. | <input type="checkbox"/> Wear a dust mask when it is necessary to enter dusty areas in order to rectify any escape of dust, or in the event other control measures fail. | <input type="checkbox"/> Check and implement the measures of controlling the risk of bacterial growth within water sources used across site, focusing most on systems where water droplets will be generated. |
| <input type="checkbox"/> Check the condition of pipes, hoses and connectors daily.               |  |  |   |

This guidance sheet is aimed at employers to help them comply with the requirements of workplace health and safety legislation, by controlling exposure to respirable crystalline silica. Specifically, this sheet provides advice on how to minimise the release of airborne dust when blowing off a road tanker of silica sand or flour.

Following the key points of this task guidance sheet will help reduce exposure.

Depending on the specific circumstances of each case, it may not be necessary to apply all of the control measures identified in this sheet in order to minimise exposure

to respirable crystalline silica. i.e. to apply appropriate protection and prevention measures. This document should also be made available to persons who may be exposed to respirable crystalline silica in the workplace, in order that they may make the best use of the control measures which are implemented.

This sheet forms part of the Good Practices Guide on silica dust prevention, which is aimed specifically at the control of personal exposure to respirable crystalline silica dust in the workplace.